

PRECISION CONTROL IN A MICROCATHETER.

The DIREXION Microcatheter is the world's FIRST truly Torqueable Microcatheter

- Unique shaft design gives the Direxion Microcatheter unrivaled torqueability while maintaining excellent trackability, flexibility, and pushability
- Combined with the unique tip shaped offering facilitates access to challenging treatment sites

Proximal nitinol cuts are farther apart for pushability

With one full hub rotation, the DIREXION Microcatheter's tip is 11x more responsive than the Progreat™ Catheter (2.4 F)*

Distal nitinol cuts are closer

together for flexibility


288°

11 X

more tip response

* Bench testing performed by Boston Scientific Corporation. Data on file. N=5. Bench test results may not necessarily be indicative of clinical performance.

Unique Tip Configurations Allow for Intraprocedural Flexibility and Efficiency

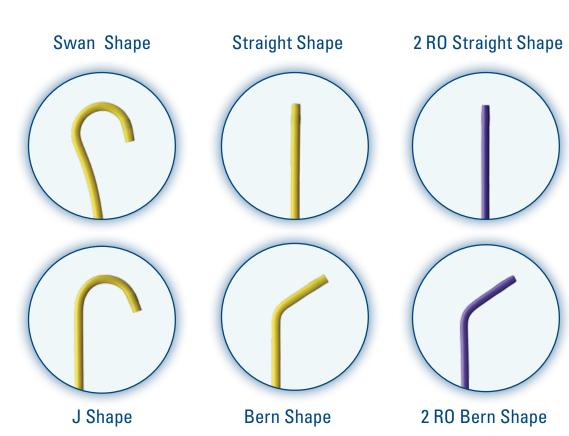

Complete Portfolio Offering

DIREXION MICROCATHETER

- Microcatheter (guidewire not included)
- Pre-Loaded with Fathom[™]-16 Guidewire
- Pre-Loaded with Transend[™]-14 Guidewire

DIREXION HI-FLO MICROCATHETER

- Microcatheter (guidewire not included)
- Pre-Loaded with Fathom-16 Guidewire
- Pre-Loaded with Transend-18 Guidewire

DIREXION™ AND DIREXION HI-FLO™

Torqueable Microcatheter Family

| Direxion Microcatheter | | | | |
|------------------------|-----------------|------------------|-----------|---------------|
| UPN | Order Number | Usable Length | Tip Shape | RO Markers |
| M001195200 | 19-520 | 105 | Straight | 1 |
| M001195210 | 19-521 | 130 | Straight | 1 |
| M001195220 | 19-522 | 155 | Straight | 1 |
| M001195230 | 19-523 | 105 | Bern | 1 |
| M001195240 | 19-524 | 130 | Bern | 1 |
| M001195250 | 19-525 | 155 | Bern | 1 |
| M001195270 | 19-527 | 130 | J | 1 |
| M001195300 | 19-530 | 130 | Swan | 1 |
| M001195320 | 19-532 | 130 | Straight | 2 |
| M001195340 | 19-534 | 130 | Bern | 2 |

| Direxion HI-FLO Microcatheter | | | | |
|-------------------------------|-----------------|------------------|-----------|---------------|
| UPN | Order Number | Usable Length | Tip Shape | RO Markers |
| M001195400 | 19-540 | 105 | Straight | 1 |
| M001195410 | 19-541 | 130 | Straight | 1 |
| M001195420 | 19-542 | 155 | Straight | 1 |
| M001195430 | 19-543 | 105 | Bern | 1 |
| M001195440 | 19-544 | 130 | Bern | 1 |
| M001195450 | 19-545 | 155 | Bern | 1 |
| M001195470 | 19-547 | 130 | J | 1 |
| M001195500 | 19-550 | 130 | Swan | 1 |

| Direxion Microcatheter Pre-Loaded System with Fathom™-16 Guidewire | | | | |
|--|-----------------|------------------------------|-----------------------|--|
| UPN | Order Number | Direxion Usable Length | Direxion Tip Shape | Fathom-16 Guidewire Overall length |
| M001195610 | 19-561 | 130 | Straight | 180 |
| M001195640 | 19-564 | 130 | Bern | 180 |

| Direxion Microcatheter HI-FLO Pre-Loaded System with Fathom-16 Guidewire | | | | |
|--|-----------------|------------------------------|-----------------------|--|
| UPN | Order Number | Direxion Usable Length | Direxion Tip Shape | Fathom-16 Guidewire Overall length |
| M001195710 | 19-571 | 130 | Straight | 180 |
| M001195740 | 19-574 | 130 | Bern | 180 |

| Direxion Microcatheter Pre-Loaded System with Transend™-14 Guidewire | | | | |
|--|-----------------|------------------------------|-----------------------|--|
| UPN | Order Number | Direxion Usable Length | Direxion Tip Shape | Transend-14 Guidewire Overall length |
| M001195810 | 19-581 | 130 | Straight | 165 |
| M001195840 | 19-584 | 130 | Bern | 165 |

| Direxion Microcatheter HI-FLO Pre-Loaded System with Transend-18 Guidewire | | | | | |
|--|-----------------|------------------------------|-----------------------|--|--|
| UPN | Order Number | Direxion Usable Length | Direxion Tip Shape | Transend-18 Guidewire Overall length | |
| M001195910 | 19-591 | 130 | Straight | 165 | |
| M001195940 | 19-594 | 130 | Bern | 165 | |

All Direxion and Direxion HI-FLO Torqueable Microcatheters are compatible with most chemotherapy agents, alcohol, and DMSO. All Direxion and Direxion HI-FLO Torqueable Microcatheters have dynamic burst pressures of 1200 PSI.

DIREXION[™] AND DIREXION HI-FLO[™] TORQUEABLE MICROCATHETERS

Prior to use, please see the complete Directions for Use for more information on Indications, Contraindications, Warnings, Precautions, Adverse Events, and Operator's Instructions.

CAUTION: Federal Law (USA) restricts this device to sale by or on the order of a physician.

INDICATIONS: The Direxion and Direxion HI-FLO Torqueable Microcatheters are intended for peripheral vascular use. The pre-loaded Fathom and Transend Guidewires can be used to selectively introduce and position the microcatheter in the peripheral vasculature. The microcatheter can be used for controlled and selective infusion of diagnostic, embolic, or therapeutic materials into the vessel.

CONTRAINDICATIONS: None Known

ADVERSE EVENTS: The Adverse Events include, but are not limited to: Allergic reaction, Death, Embolism, Hemorrhage/Hematoma, Infection, Pseudoaneurysm, Stroke, Vascular thrombosis, Vessel occlusion, Vessel spasm, Vessel trauma (dissection, perforation, rupture)

WARNING: Never advance or withdraw an intravascular device against resistance until the cause of resistance is determined by fluoroscopy. Movement of the microcatheter or guidewire against resistance may result in damage or separation of the microcatheter or guidewire tip, or vessel perforation. Direxion Microcatheter family is not intended for use in the coronary vasculature or neurovasculature. The Direxion HI-FLO Microcatheter is not designed for the delivery of embolic coils. Use of excessive force to manipulate the microcatheter against resistance can cause a fracture in the nitinol shaft. Take care not to over-torque the microcatheter, and to relieve any tension before withdrawal by rotating the microcatheter in the opposite direction.

PRECAUTIONS: This device should be used only by physicians thoroughly trained in percutaneous, intravascular techniques and procedures Do not introduce the microcatheter without guidewire support as this may cause damage to the proximal shaft of the catheter. Because the microcatheter may be advanced into narrow sub-selective vasculature, repeatedly assure that the microcatheter has not been advanced so far as to interfere with its removal. If other interventional devices are used with the microcatheter, then refer to that product labeling for intended use, contraindications and potential complications associated with the use of that interventional device. If other interventional devices are used with the use of that interventional device. Always verify tip response under fluoroscopy and the position of the proximal portion of the microcatheter, to avoid shaft coiling and/or fracture. If resistance is felt during rotation of the microcatheter and there is no visible tip response, stop and rotate in the opposite direction to release tension. Should the shaft fracture under too much tension, attempt to advance a guidewire through the fracture point and past the distal lumen, or retract the microcatheter into the guiding catheter. Then withdraw the system in a smooth motion, minimizing any rotation and torquing.

Direxion, Direxion HI-FLO, Fathom, and Transend are unregistered or registered trademarks of Boston Scientific Corporation or its affiliates. All other trademarks are property of their respective owners.



Peripheral Interventions

300 Boston Scientific Way Marlborough, MA 01752-1234

www.bostonscientific.com

To order product or for more information contact customer service at 1.888.272.1001.

© 2014 Boston Scientific Corporation or its affiliates. All rights reserved.

PI-181204-AC JUL2014